

(12) #16AWG CUAG 1000V TEFLON WIRES

28023/1/1 OR

**ENVIRONMENTAL CONDITIONS**

TEMP -40° TO +225°F  
PRESSURE  
VACUUM  
CHEMICALS  
OTHER

**QC TESTING**

ELECTRICAL HIPOT @ 1000VAC  
VACUUM LEAK @ NONE  
PRESSURE LEAK @ 100 PSI

**CONSTRUCTION**


INTERNAL 8232  
EXTERNAL  
POTTING 1469/1481

**HOUSING SPECIFICATIONS**

HSG P/N 13783  
THREAD 3/4"  
MAT'L BRASS  
TYPE NPT PLUG

**LEAD WIRE / CONNECTOR DATA**

CONTAINS  
(12) #16AWG CUAG 1000V TEFLON WIRES, 1996-16-0.

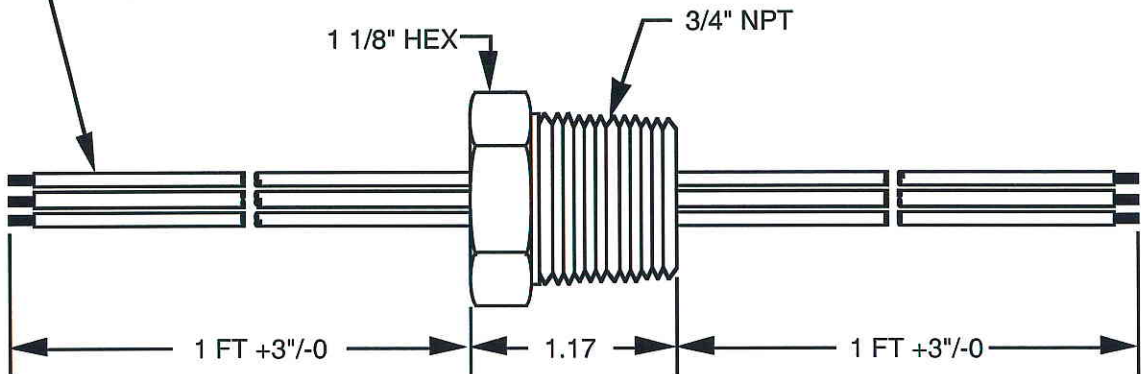

**NOTES:**

- 1. NOT ALL WIRES SHOWN.
- 2. TAG WIRES END TO END.

UNLESS NOTED: All Dimension In Inches, Remove All Burrs, Break All Sharp Edges, Tolerances: .XX ±.01, .XXX ±.005

Customer Approval:  
By: *mjk*  
Date: *9/24/03*

**DOUGLAS ENGINEERING COMPANY**  
14 Beach Street, Rockaway, NJ 07866  
PH: 973-627-8230 FX: 973-627-5798

DE 2

MASTER

ECN#	REV	APP'D	DATE	Title	Rev.
				3/4" NPT FEEDTHRU	
				Drawn CR	
				Date 9/24/03	
				App'd <i>mjk</i>	
				Date <i>9/24/03</i>	
				Dwg No	
				<b>28023/1/1</b>	<b>OR</b>
Ref: ARGO TECH				SCALE: NTS	SHEET 1 OF 1

FIRST ARTICLE INSPECTION:  REQUIRED  NOT REQUIRED