


28071/1/1 OR

ENVIRONMENTAL CONDITIONS

TEMP -40° TO +225°F
 PRESSURE
 VACUUM
 CHEMICALS
 OTHER

QC TESTING

ELECTRICAL HIPOT @ 1000VAC
 VACUUM LEAK @ 1 X 10⁽⁻⁸⁾ STD cc He/sec
 PRESSURE LEAK @

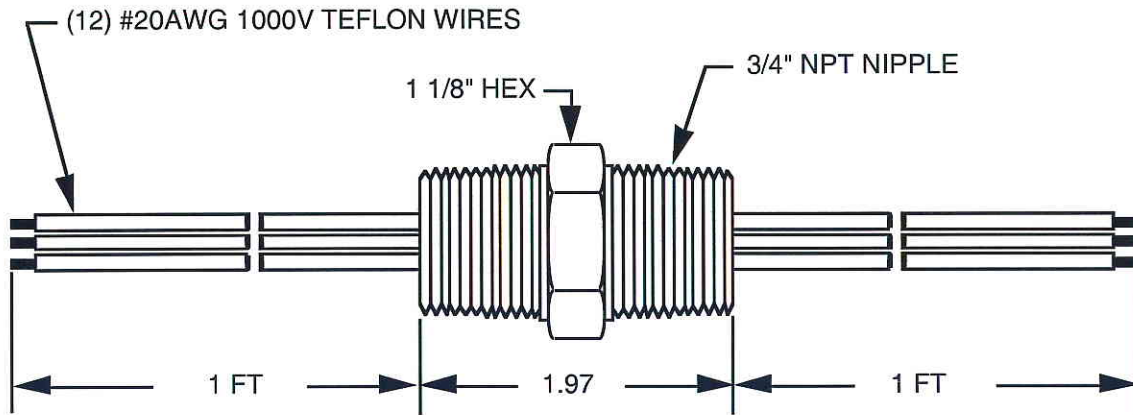

CONSTRUCTION

INTERNAL 5294
 EXTERNAL
 POTTING 1469/1481

HOUSING SPECIFICATIONS

HSG P/N 6098-11-1
 THREAD 3/4"
 MAT'L BRASS
 TYPE NPT NIPPLE

LEAD WIRE / CONNECTOR DATA

CONTAINS:
 (12) #20AWG 1000V TEFLON WIRES, 1996-20-0.

NOTES:

1. NOT ALL WIRES SHOWN.
2. MARK/TAG WIRES END TO END.

UNLESS NOTED: All Dimension In Inches, Remove All Burrs, Break All Sharp Edges, Tolerances: .XX ±.01, .XXX ±.005

MASTER

DOUGLAS ENGINEERING COMPANY

14 Beach Street, Rockaway, NJ 07866
 PH: 973-627-8230 FX: 973-627-5798

ECN#	REV	APP'D	DATE	Title	Rev.
				3/4" NPT NIPPLE FEEDTHRU	OR
Drawn TW Date 5/23/2001 App'd <i>mjl</i> Date 5/25/01				Dwg No 28071/1/1	

Ref: GULF COAST HYPERBARIC

SCALE: NTS

SHEET 1 OF 1