

28160/1/1

ATM

PRESSURE

ENVIRONMENTAL CONDITIONS

TEMP -40°F to +225°F

PRESSURE 200 PSI

VACUUM

CHEMICALS

OTHER

QC TESTING

VACUUM LEAK @

PRESSURE LEAK @ 500PSI

ELECTRICAL HIPOT@ 1000VAC

HOUSING SPECIFICATIONS

HSG P/N 12271-3-2

SIZE 3/4"

MAT'L STN STL


TYPE SAE

LEAD WIRE/CONNECTOR DATA

CONTAINS:

(12) #20AWG, 1000V TEFLON

P/N 1996-20-0

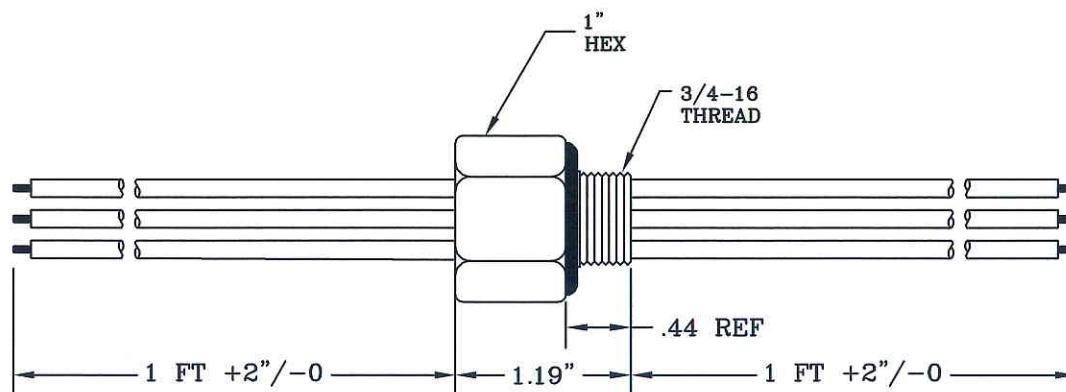

NOTES:

1. NOT ALL WIRES SHOWN
2. MARK AND TAG WIRES END TO END
3. O-RING INCLUDED, 26309-908

CUSTOMER APPROVAL

By: _____

Date: _____

MASTER

UNLESS NOTED: All Dimensions in Inches, Remove All Burrs, Break All Sharp Edges, Tolerances: .XX ±.01, .XXX ±.005

DOUGLAS ELECTRICAL COMPONENTS



14 Beach Street, Rockaway, NJ 07866

PH: 973-627-8230 FX: 973-627-5798

REV	ECN#	APP'D	DATE	TITLE	Rev.
				3/4" SAE FEEDTHRU	
				Drawn TW	
				Date 8/21/07	
				App'd	
				Date 8/23/07	
				Dwg No 28160/1/1	
					OR
Ref: FEV ENGINE TECH				SCALE: NTS	SHEET 1 OF 1

VALID THRU Dec. 2010

