

ATMOSPHERE

VACUUM

ENVIRONMENTAL CONDITIONS

TEMP -40° TO +225°F
 PRESSURE
 VACUUM
 CHEMICALS
 OTHER

QC TESTING

ELECTRICAL HIPOT @ 150VAC
 VACUUM LEAK @ 1 X 10⁻⁸ STD cc He/sec
 PRESSURE LEAK @ NONE

CONSTRUCTION

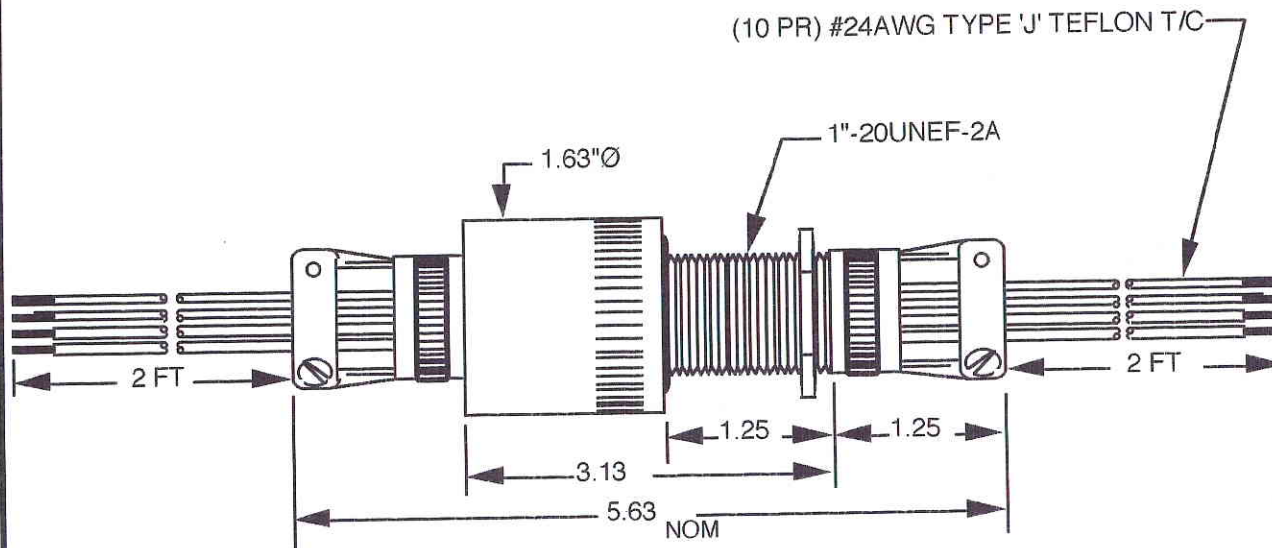
INTERNAL 5294
 EXTERNAL 5304-123
 POTTING 1469/1481

HOUSING SPECIFICATIONS

HSG P/N 12376-2-3
 THREAD 1"-20 UNEF-2A
 MAT'L STAINLESS STEEL
 TYPE FACESEAL O-RING

LEAD WIRE / CONNECTOR DATA

CONTAINS:
 (10 PR) #24AWG TYPE 'J' TEFLON T/C, 6121-24-1.

**NOTES:**

1. MARK/TAG WIRES END TO END.
2. NOT ALL WIRES SHOWN.

UNLESS NOTED: All Dimension In Inches, Remove All Burrs,
 Break All Sharp Edges, Tolerances: .XX ±.01, .XXX ±.005

DOUGLAS ENGINEERING COMPANY
 14 Beach Street, Rockaway, NJ 07866
 PH: 201-627-8230 FX: 201-627-5798

MASTER

ECN#	REV	APP'D	DATE	Title	Rev.
				1"-20 FACESEAL T/C F/T	
				Dwg No	
				28335J/2/2	OR
				Drawn TW	
				Date 5/24/96	
				App'd	
				Date 5/24/96	
Ref: CATALOG / INERT SYSTEMS				SCALE: NTS	SHEET 1 OF 1